



Mapping/capacity:

CHS=(129/255/63), 2072385 total sectors = 1012 MByte

block sizes:

physical: 1*512 Byte, sustained transfer rate: 128 sectors (64.0 KByte)

Interface speed (at 0.0%):

sequential: 76.2 MByte/s, delayed (0.90 ms): 58.6 MByte/s, "core test": 58.5 MByte/s

Sustained read rate:

average 78466.6, min 56936.5, max 85100.6 [KByte/s]

Sustained write rate



average 65988.8, min 37324.1, max 73169.0 [KByte/s]

Access time over whole disk:

average 0.12 (0.12r/0.12w, min 0.11r/0.10w, max 0.47r/0.68w) [ms]

Access time below 504 MByte:

average 0.12 (0.12r/0.12w, min 0.11r/0.10w, max 0.28r/0.87w) [ms]

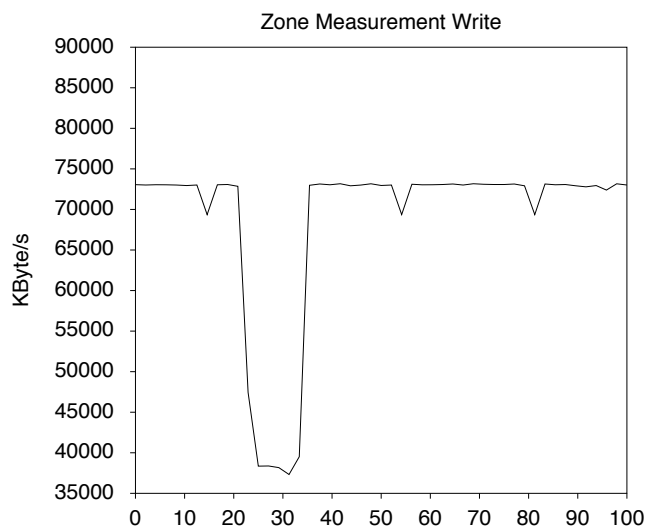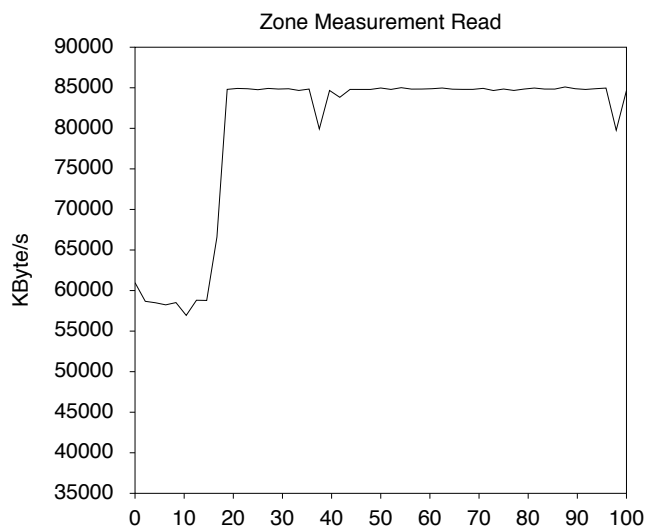

application profiles [KByte/s]

