



Mapping/capacity:

CHS=(129/255/63), 2072385 total sectors = 1012 MByte

block sizes:

physical: 1*512 Byte, sustained transfer rate: 128 sectors (64.0 KByte)

Interface speed (at 0.0%):

sequential: 79.6 MByte/s, delayed (0.86 ms): 63.9 MByte/s, "core test": 66.7 MByte/s

Sustained read rate:

average 77500.0, min 56376.3, max 84883.3 [KByte/s]

Sustained write rate



average 65578.9, min 36955.8, max 73073.4 [KByte/s]

Access time over whole disk:

average 0.13 (0.12r/0.13w, min 0.10r/0.11w, max 0.37r/1.69w) [ms]

Access time below 504 MByte:

average 0.28 (0.42r/0.13w, min 0.27r/0.11w, max 3.74r/15.73w) [ms]

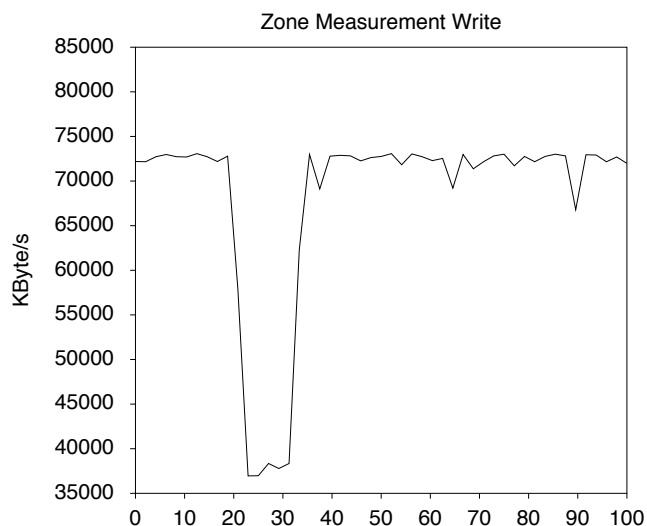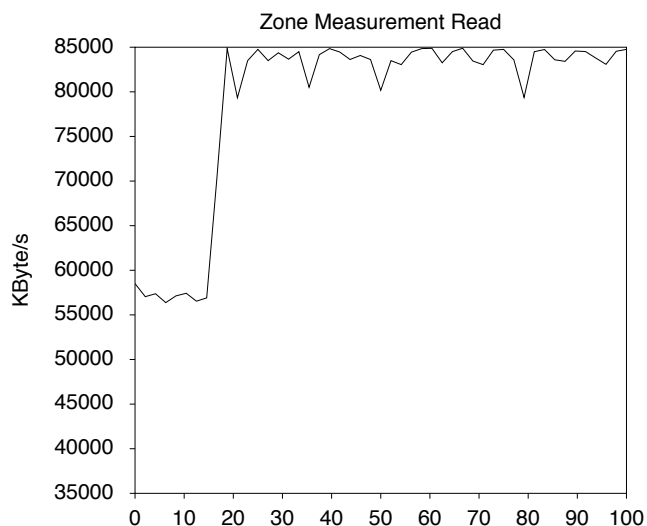

application profiles [KByte/s]

