



Mapping/capacity:

CHS=(129/255/63), 2072385 total sectors = 1012 MByte

block sizes:

physical: 1*512 Byte, sustained transfer rate: 128 sectors (64.0 KByte)

Interface speed (at 0.0%):

sequential: 76.8 MByte/s, delayed (0.90 ms): 58.7 MByte/s, "core test": 58.4 MByte/s

Sustained read rate:

average 77933.5, min 56122.7, max 85137.7 [KByte/s]

Sustained write rate:



average 65597.6, min 37053.9, max 73171.6 [KByte/s]

Access time over whole disk:

average 0.13 (0.13r/0.13w, min 0.11r/0.10w, max 0.79r/9.97w) [ms]

Access time below 504 MByte:

average 0.12 (0.12r/0.13w, min 0.10r/0.10w, max 0.53r/0.34w) [ms]

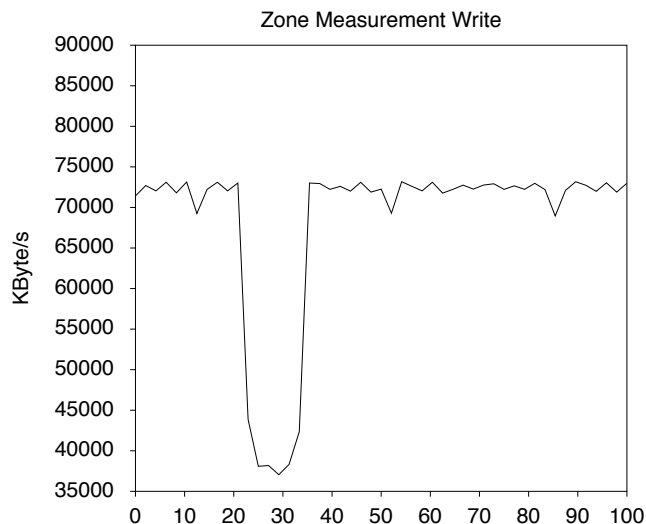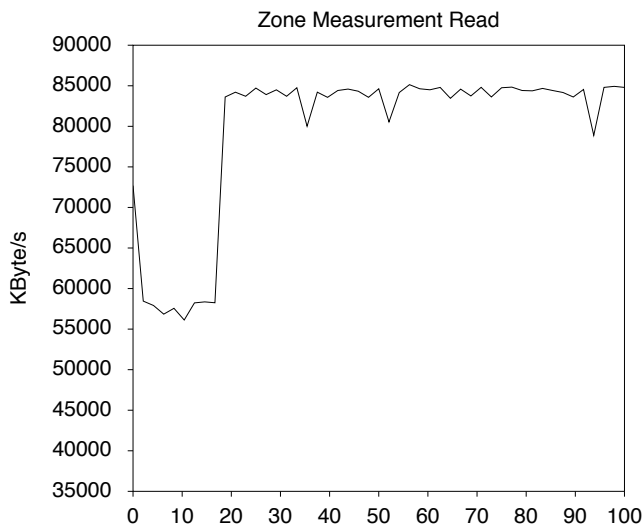

application profiles [KByte/s]

swapping: 32422.1

installing: 107243.0

Word: 74029.6

Photoshop: 58932.5

copying: 115632.0

F-Prot: 48920.2

application index (inaccurate!): 66413.5

timer resolution: 0.000 μ s, 3000.070 MHz, timer statistics: 794121215 calls, min 1.45 μ s, average 7042.53 μ s, max 568253.03 μ s

command line: h2benchw.exe -a -! -english -w ramdrive3 4

Test started: 10-05-05 04:15:16, test version: \$Id: h2bench.c,v 3.6 2002/10/31 14:06:35 bo Exp \$/Win32, file name 'ramdrive3'